

Daylight Reporter



kobold
by bron

Halogen Lights

kobold SM300 (Super Mini)

312-0170



Technical data

Lamp output	150 W / 300 W
Lamp voltage	120 V / 230 V
Lamp holder	GX 6.35
Focus range	26°-54°
Photometric Spot / Flood in 3 m (10 ft)	2070 / 840 lux (192 / 78 fc)
Safety class	II
Dimensions L x W x H	175 x 120 x 125 mm (6.9" x 4.7" x 4.9")
Weight	0.8 kg (1.8 lbs)
Cable length	5 m (16.5 ft)
Stand connection	Ø 16 mm (5/8") mount


150/300 Watt / 120/230 V

Lamp head, reflector with filter slot, safety glass, 4-leaf barn door not included

Accessories

Halogen lamp 300 W / 230 V / GX 6.35	613-5300
Halogen lamp 300 W / 120 V / GX 6.35	613-5303
Halogen lamp 150 W / 230 V / GX 6.35	613-5301
Halogen lamp 150 W / 120 V / GX 6.35	613-1503
Rotatable 4-leaf barn door with gel clamps	741-0745
Safety glass in frame	713-0589
Diffusion filter, in frame with pouch	713-0571
Daylight filter 5500 K, in frame with pouch	713-0584
Handle with Ø 16 mm (5/8") spigot	741-0710
Carrying case to SM300 Kit 3, spare	733-0215

Light output, 300 W

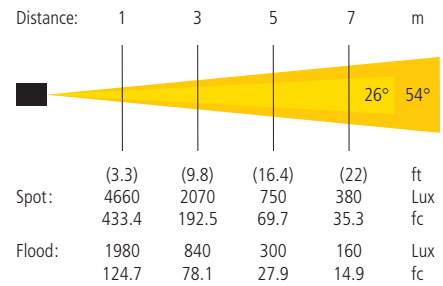

Advantages

- The SM300 halogen reporter lamp can be used as a stand-mounted or handheld light
 - Rotatable 4-leaf barn door with gel clamps
 - Quick lamp change (reflector quick-change system)
 - Slot for safety glass or glass filter
 - Can be focused
 - Large angle of inclination
 - Mount Ø 16 mm (5/8")
 - Compact dimensions and light weight
 - Compact and robust design
- Available as Kit with 3 lamp heads (please see price list).

kobold RL300

312-0176-x



Technical data

Lamp output	300 W
Lamp voltage	120 V / 230 V
Lamp holder	GX 6.35
Focus range	26°-54°
Photometric Spot / Flood in 5 m (16,4 ft)	2070 / 840 lux (192 / 78 fc)
Safety class	II
Dimensions L x W x H	160 x 120 x 155 mm (6.3" x 4.7" x 6.1" / 9.3")
Weight	1 kg (2.2 lbs)
Cable length	5 m (16.5 ft)
Stand connection	Spigot Ø 16 mm (5/8") Mount Ø 16 mm (5/8")


150/300 Watt / 120/230 V

Lamp head, reflector with filter slot, safety glass, 4-leaf barn door not included

Accessories

Halogen lamp 300 W / 230 V / GX 6.35	613-5300
Halogen lamp 300 W / 120 V / GX 6.35	613-5303
Halogen lamp 150 W / 230 V / GX 6.35	613-5301
Halogen lamp 150 W / 120 V / GX 6.35	613-1503
4-leaf barn door, rotatable	741-0745
Diffusion filter, in frame with pouch	713-0571
Conversion filter 5500 K, in frame with pouch	713-0584
Safety glass, in frame	713-0589
Stand adapter 45° with spigot Ø 16 mm (5/8")	741-0740
Stand adapter 45° with mount Ø 16 mm (5/8")	741-0741
Stand adapter straight with spigot Ø 16 mm	741-0735
Stand adapter straight with mount Ø 16 mm (5/8")	741-0736
Adapter with camera shoe	741-0737
Carrying case for RL300 Kit 3, spare	733-0215

Light output, 300 W

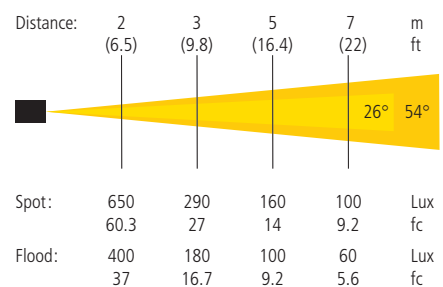

Advantages

- The RL300 can also be used as a stand-mounted or camera-mounted light, depending on the adapter used
 - Rotatable 4-leaf barn door with gel clamp
 - Quick lamp change (bayonet lock)
 - Slot for safety glass or glass filter
 - Can be focused
 - Large angle of inclination
 - Ergonomic grip
 - Compact and robust design
 - 1/4" thread for adapters with Ø 16 mm (5/8") stand spigot, mount or camera shoe
 - High light yield
 - Can be operated with one hand
- Available as Kit with 3 lamp heads (please see price list).

Printed in Germany 08.07

kobold
by bron